



US007176770B2

(12) **United States Patent**  
**Ayazi et al.**

(10) **Patent No.:** **US 7,176,770 B2**  
(45) **Date of Patent:** **Feb. 13, 2007**

(54) **CAPACITIVE VERTICAL SILICON BULK ACOUSTIC RESONATOR**

(75) Inventors: **Farrokh Ayazi**, Atlanta, GA (US);  
**Siavash Pourkamali**, Smyrna, GA (US); **Gavin Kar-Fai Ho**, Vancouver (CA)

(73) Assignee: **Georgia Tech Research Corp.**, Atlanta, GA (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 106 days.

(21) Appl. No.: **11/208,818**

(22) Filed: **Aug. 22, 2005**

(65) **Prior Publication Data**

US 2006/0044078 A1 Mar. 2, 2006

**Related U.S. Application Data**

(60) Provisional application No. 60/503,909, filed on Aug. 24, 2004.

(51) **Int. Cl.**

**H03H 9/08** (2006.01)

**H03H 9/24** (2006.01)

**H03H 9/46** (2006.01)

(52) **U.S. Cl.** ..... **333/186; 333/188; 333/200**

(58) **Field of Classification Search** ..... 333/186-188  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

5,976,994 A \* 11/1999 Nguyen et al. .... 438/795  
6,238,946 B1 \* 5/2001 Ziegler ..... 438/50

6,600,389 B2 \* 7/2003 Ma et al. .... 333/186  
6,707,351 B2 \* 3/2004 Gorrell ..... 333/188  
2005/0195050 A1 \* 9/2005 Lutz et al. .... 333/186  
2005/0242904 A1 \* 11/2005 Lutz et al. .... 333/200

**OTHER PUBLICATIONS**

Masanori Ueda, et al., "Ultra-miniaturized and high performance PCS SAW duplexer with steep cut-off filters", MTT-S 2004, vol. 2, pp. 913-916, Jun. 2004.

R. C. Ruby, et al., "Thin film bulk wave acoustic resonators (FBAR) for wireless applications", Ultrasonics Symposium, Oct. 2001, vol. 1, pp. 813-821.

S. Li, et al., "Micromechanical hollow disk ring resonators", MEMS 2004, pp. 821-824.

S. Pourkamali and F. Ayazi, "SOI-based HF and VHF single-crystal silicon resonators with sub-100nm nanometer vertical capacitive gaps", Transducers '03, pp. 837-840, The 12<sup>th</sup> International Conf. on Solid State Sensors, Actuators and Microsystems, Boston, Jun. 8-12, 2003.

(Continued)

*Primary Examiner*—Barbara Summons


(74) *Attorney, Agent, or Firm*—Kenneth W. Float

(57)

**ABSTRACT**

Disclosed are high frequency, vertical silicon bulk acoustic resonators. Resonator structures having a relatively large transduction areas fabricated using a HARPSS fabrication process provide for high frequency capacitive resonators with significantly low impedance values. Impedance values as low as a few kilo-Ohms to sub-kilo-Ohm and quality factors in the range of 20,000 to 90,000 in the VHF range have been achieved for a first thickness mode of fabricated vertical silicon bulk acoustic resonators. Resonant frequencies as high as 983 MHz have been demonstrated for higher third thickness modes of the vertical silicon bulk acoustic resonators.

**20 Claims, 4 Drawing Sheets**

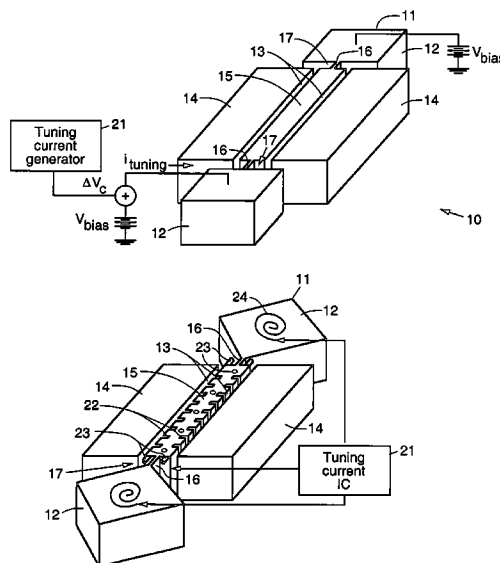

OTHER PUBLICATIONS

S. Pourkamali, et al, "VHF single crystal silicon capacitive elliptic bulk-mode disk resonators part II: implementation and characterization", JMEMS, vol. 13, No. 6, Dec. 2004.

S. Pourkamali and F. Ayazi, "High frequency capacitive micromechanical resonators with reduced motional resistance using the HARPSS technology", proceedings, 5th Silicon RF topical meeting 2004, pp. 147-150.

A. San Paulo et al., Atomic Force Microscopy Characterization of Electromechanical Properties of RF Acoustic Bulk Wave Resonators, MEMS 2004, pp. 169-172.

Siavash Pourkamali et al., "High-Q Single Crystal Silicon HARPSS Capacitive Beam Resonators With Self-Aligned Sub-100-nm Transduction Gaps", Journal of Microelectromechanical Systems, vol. 12, No. 4, Aug. 2003, pp. 487.

J. D. Larson, et al, "Power handling and temperature coefficient studies in FBAR duplexers for the 1900 MHz PCS band", Ultrasonics Symposium, Oct. 2000, vol. 1, pp. 869-874.

\* cited by examiner

Fig. 1

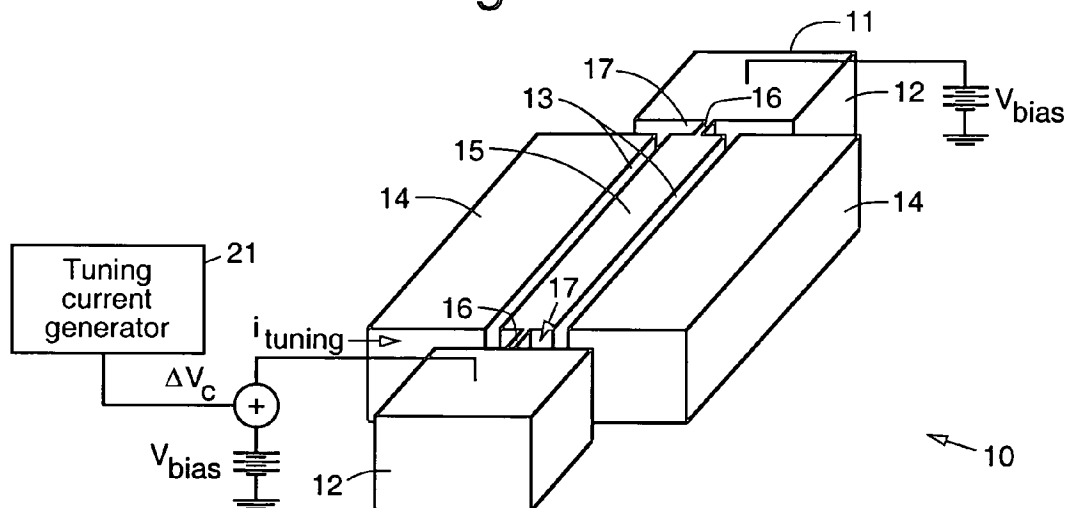


Fig. 2

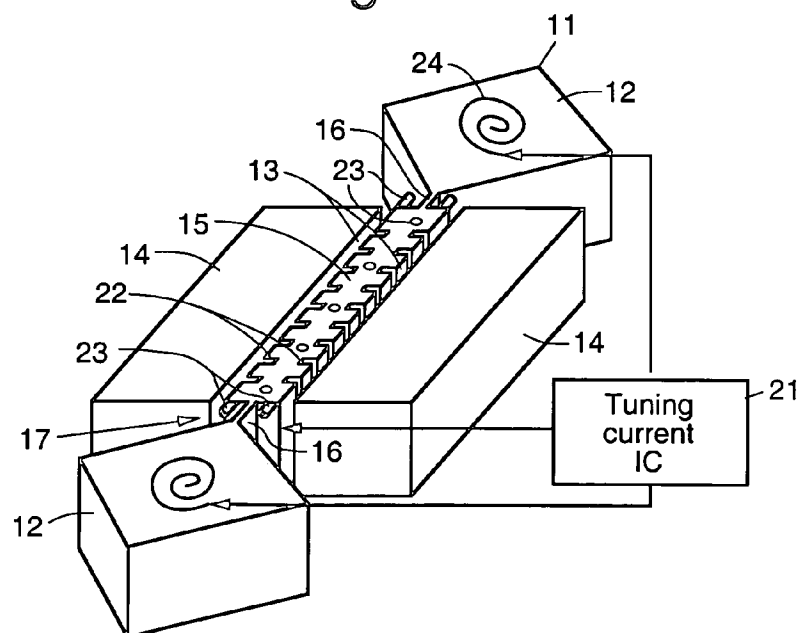
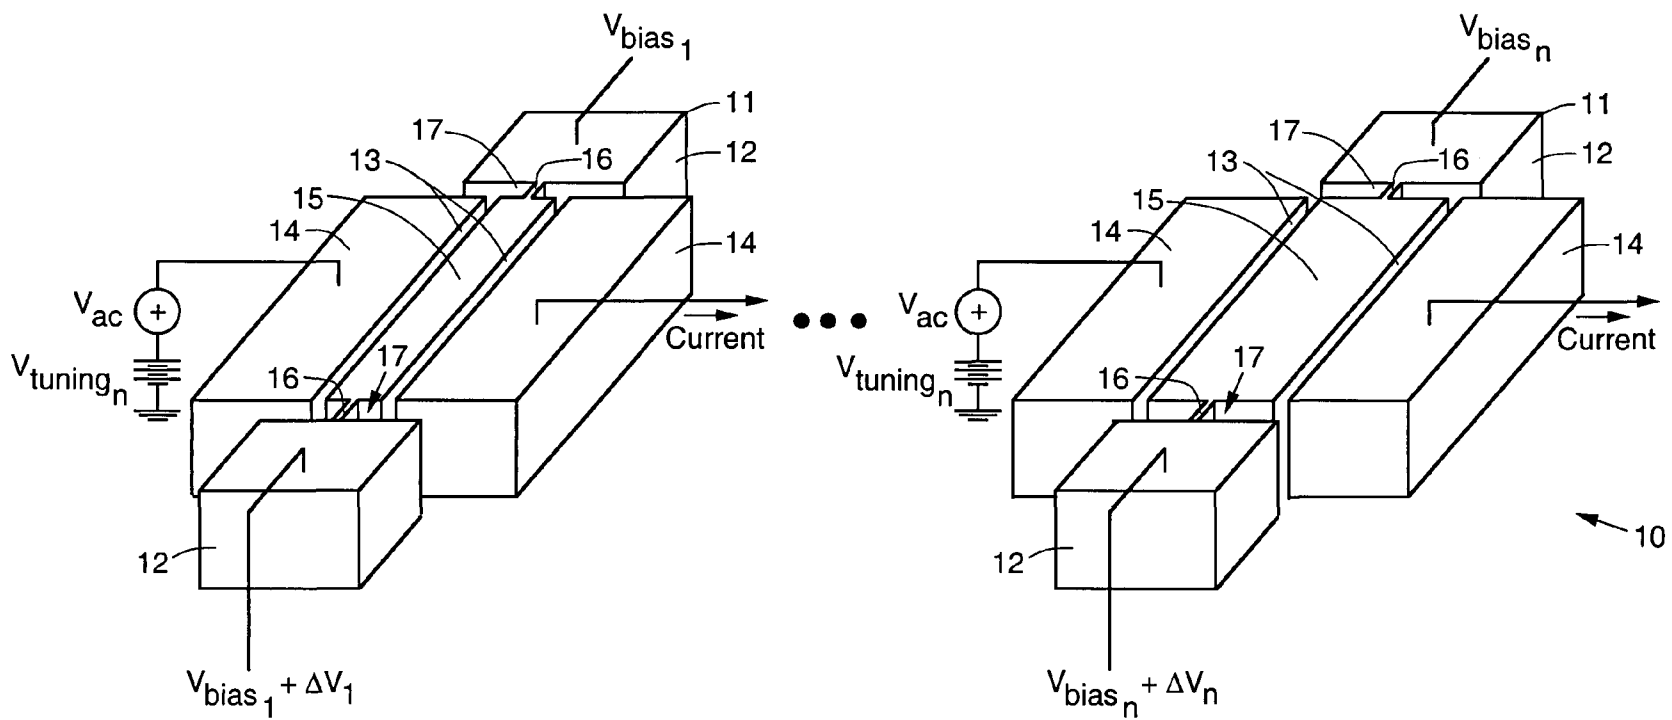


Fig. 1a



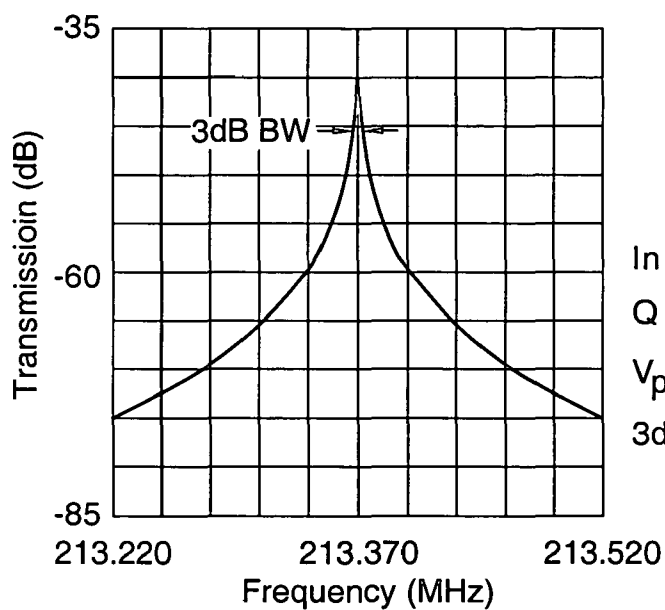


Fig. 3

In vacuum

 $Q \sim 28,700$  at 213.4MHz $V_p = 100V$ ,  $R_m = 6.3k\Omega$ 

3dB BW = 7.4 kHz

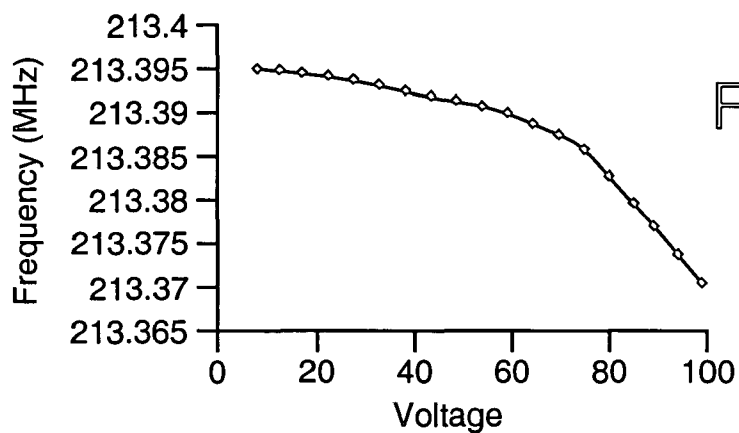


Fig. 4

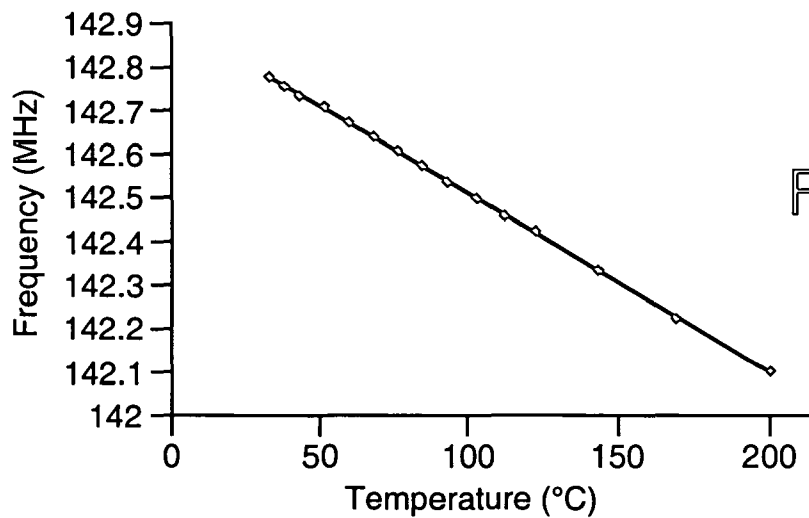


Fig. 5

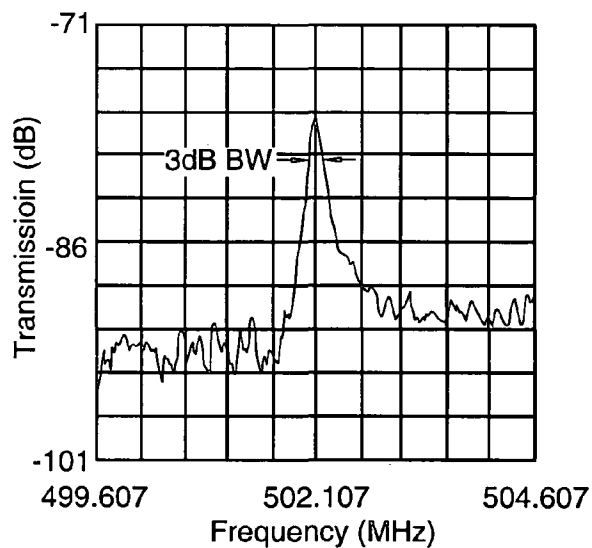


Fig. 6

3rd mode in vacuum

$Q = 3100 @ 502 \text{ MHz}$

$V_p = 100 \text{ V}$

$R_m = 360 \text{ k}\Omega$

$W = 15 \mu\text{m}, L = 150 \mu\text{m}$

$t = 10 \mu\text{m}, g = 145 \text{ nm}$

$L_s = 7.5 \mu\text{m}, W_s = 3 \mu\text{m}$

3dB BW = 162 kHz

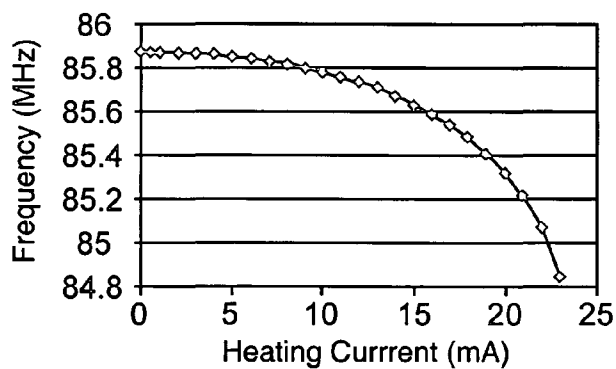


Fig. 7a

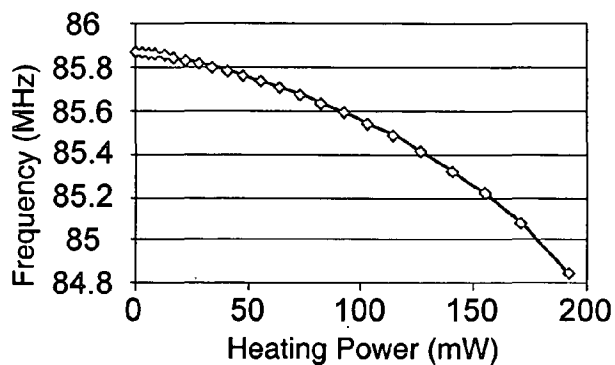


Fig. 7b

## CAPACITIVE VERTICAL SILICON BULK ACOUSTIC RESONATOR

This application claims the benefit of U.S. Provisional Application No. 60/503,909, filed Aug. 24, 2004.

### BACKGROUND

The present invention relates generally to semiconductor processing and fabrication methods, and more particularly, to a capacitive vertical silicon bulk acoustic resonator.

High frequency mechanical resonators such as surface acoustic wave (SAW) and film bulk acoustic wave resonators (FBAR) and filters are widely used in RF front-end duplexers as band-select filters. Such resonators are discussed in Masanori Ueda, et al., "Ultra-miniaturized and high performance PCS SAW duplexer with steep cut-off filters", MTT-S 2004, Vol. 2, pp. 913-916, and R. C. Ruby, et al., "Thin film bulk wave acoustic resonators (FBAR) for wireless applications", Ultrasonics Symposium, 2001, Vol. 1, pp. 813-821, respectively.

Recent developments in silicon micromachining technologies have paved the way for implementation of high frequency silicon capacitive resonators with close to one order of magnitude higher quality factors (Q) compared to the SAW resonators and film bulk acoustic wave resonators. Such devices are gradually entering the market, opening up new opportunities for more advanced wireless communication systems. Due to their lithographically defined resonant frequencies, in-plane capacitive resonators with operating frequencies in a wide range from tens of kHz up to GHz can be implemented on the same substrate simultaneously. This will allow implementation of multi-band wireless communication systems.

In addition, due to their much larger Q values compared to piezoelectric resonators, capacitive resonators may enable direct channel selection right after the antenna resulting in dramatic simplification of the transceiver architectures. Low cost batch fabrication using conventional silicon processing techniques is another advantage for silicon resonators.

Despite resonant frequencies in the VHF and UHF range with quality factors as high as a few tens of thousands, high equivalent electrical impedance remains the major drawback for incorporation of such devices in electronic systems. Fabrication and mechanical design techniques have been utilized to alleviate the impedance issue, but the demonstrated impedances in the VHF and UHF range have heretofore not been promising. See for example, S. Li, et al., "Micromechanical hollow disk ring resonators", MEMS 2004, pp. 821-824, S. Pourkamali and F. Ayazi, "SOI-based HF and VHF single-crystal silicon resonators with sub-100 nm nanometer vertical capacitive gaps", Transducers '03, pp. 837-840, S. Pourkamali, et al., "VHF single crystal silicon capacitive elliptic bulk-mode disk resonators part II: implementation and characterization", JMEMS, Vol. 13, No. 6, December 2004, and S. Pourkamali and F. Ayazi, "High frequency capacitive micromechanical resonators with reduced motional resistance using the HARPSS technology", Proceedings, 5th Silicon RF topical meeting 2004, pp. 147-150.

The S. Pourkamali et al. paper "High frequency capacitive micromechanical resonators with reduced motional resistance using the HARPSS technology", Proceedings, 5th Silicon RF topical meeting 2004, pp. 147-150, discusses disk resonators that are somewhat similar in function to the capacitive vertical silicon bulk acoustic resonator disclosed herein. However, nothing is disclosed or suggested in this

paper regarding a resonator element having a length-to-frequency-determining-width ratio larger than one, or a resonator element that comprises a bar having rectangular cross sections, for example.

A paper entitled "High-Q Single Crystal Silicon HARPSS Capacitive Beam Resonators With Self-Aligned Sub-100-nm Transduction Gaps" by Siavash Pourkamali et al., published in Journal of Microelectromechanical Systems, Vol. 12, No. 4, August 2003, discusses capacitive beam resonators that are somewhat similar to the capacitive vertical silicon bulk acoustic resonator disclosed herein. However, nothing is disclosed or suggested in this paper regarding a resonator element that is coupled by way of support structures to bias pads, or that the resonant frequency of the resonator element is primarily determined by a single in-plane lateral dimension, for example.

It would be desirable to have capacitive vertical silicon bulk acoustic resonators that operate in the HF/VHF/UHF bands, exhibit low impedance values and have quality factors that are as high as possible.

### BRIEF DESCRIPTION OF THE DRAWINGS

The various features and advantages of the present invention may be more readily understood with reference to the following detailed description taken in conjunction with the accompanying drawings, wherein like reference numerals designate like structural elements, and in which:

FIG. 1 illustrates a first exemplary embodiment of a capacitive silicon bulk acoustic wave resonator (SiBAR);

FIG. 1a shows an exemplary capacitive silicon bulk acoustic wave resonator having a plurality of resonator elements with different resonance frequencies (different resonator element widths) that are fabricated on a single substrate;

FIG. 2 illustrates a second exemplary embodiment of a capacitive silicon bulk acoustic wave resonator;

FIG. 3 is a graph that illustrates frequency response of an exemplary reduced to practice capacitive silicon bulk acoustic wave resonator in its first width longitudinal mode;

FIG. 4 is a graph that shows the measured electrostatic frequency tuning characteristic of an exemplary SiBAR showing 25 kHz of frequency tuning by changing the polarization voltage;

FIG. 5 is a graph that shows the typical temperature dependence of frequency of a 142.7 MHz single crystal silicon SiBAR showing a TCF of -26.6 ppm/° C.;

FIG. 6 is a graphs that show frequency response of an exemplary reduced to practice capacitive silicon bulk acoustic wave resonator operating in third width longitudinal modes; and

FIGS. 7a and 7b are graphs that illustrate test results relating to current tuning of the resonator.

### DETAILED DESCRIPTION

Referring to the drawing figures, FIG. 1 illustrates a first exemplary embodiment of a vertical capacitive silicon bulk acoustic wave resonator (SiBAR) 10. The vertical capacitive silicon bulk acoustic wave resonator 10 may be considered to be a vertically placed version of an FBAR having a bare silicon resonating membrane that is operated electrostatically in its horizontal width longitudinal mode. The resonance frequency of the resonator 10 in its width longitudinal mode is primarily determined by its in plane width (the smaller in-plane dimension as shown in FIG. 1). The in-plane length of the resonator 10 and its vertical thickness do

not directly affect its resonance frequency and can be optimized to provide optimal quality factor and impedance for the resonator. In some cases the frequency determining dimension, referred to as the width, may be larger than the other in-plane dimension.

The vertical capacitive silicon bulk acoustic wave resonator **10** comprises a silicon substrate **11** comprising one or more bias pads **12** that are separated from an elongated portion of the silicon substrate **11**. The elongated portion of the silicon substrate **11** comprises a single crystal silicon (SCS) resonator element **15** (or resonating membrane **15**). Single crystal silicon is an anisotropic material, as is well-known to those skilled in the art. The resonator element **15** is connected to the bias pads **12** by one or more silicon bridge portions **16** or support beams **16** disposed at respective ends of the resonator element **15**. The bias pads **12** form anchors in or to the substrate **11** that allow the resonator element **15** to be suspended between the support beams **16**.

Electrodes **14**, which may comprise polysilicon, for example, are disposed adjacent sides of the resonator element **15** and are separated therefrom by capacitive gaps **13**. The capacitive gaps **13** may comprise air gaps, or may be filled with a fluid material. The resonator element **15** is separated from adjacent edges of the respective electrodes **14** by openings **17** such as air gaps.

It is desirable that the size of the one or more silicon support beams **16** be relatively small, and the smaller the better. This reduces coupling from the resonator element **15** to the bias pads **12**.

The exemplary vertical capacitive silicon bulk acoustic wave resonator **10** may be fabricated to operate in one-port or two-port configurations. In the one-port configuration, the electrodes **14** are shorted together. In the two-port configuration, the electrodes **14** are independent of each other and function as drive and sense electrodes. One or both of the bias pads **12** are employed which are voltage biased.

FIG. 1 also shows that a tuning current generator **21** may be employed that couples current to the resonator element **15** by way of the bias pads **12** to heat the resonator element **15**. This functions to frequency tune the resonator element **15** and vertical capacitive silicon bulk acoustic wave resonator **10**.

FIG. 2 illustrates a second exemplary embodiment of a capacitive silicon bulk acoustic wave resonator **10**. The second embodiment of the resonator **10** is substantially similar to the resonator **10** shown in FIG. 1. However, in the resonator **10** shown in FIG. 2, the resonator element **15** has a plurality of notches **22** formed along surfaces adjacent to the electrodes **14** and capacitive gaps **13**. The notches **22** are repeated periodically, and divide the resonator element **15** into a plurality of smaller mechanically connected structures.

In addition, heater elements **24** are shown disposed on the bias pads **12** that are coupled to the tuning current generator **21** and supply heat to the resonator element **15** to facilitate frequency tuning. A separate integrated circuit **21** may be employed as a control circuit that applies a temperature dependent electrical voltage or current to the resonator element **15** to cancel or control its temperature dependent frequency drift.

Also, the resonator element **15** is shown having one or more tuning elements **23** disposed thereon or extending therefrom. Frequency tuning is done by selectively removing at least a portion of the tuning elements **23**. The tuning elements **23** may comprise metal particles or material, or additional portions of the material from which the resonator element **15** is made. Metal tuning elements **23** may be

trimmed or removed using a laser, for example, which evaporates the tuning elements without affecting the underlying silicon material, for example.

The vertical capacitive silicon bulk acoustic wave resonator **10** operates in width longitudinal mode. Compared to a piezoelectric film bulk acoustic wave resonator, where the resonant frequency is determined by the thickness of a deposited piezoelectric film, the resonant frequency of the vertical capacitive silicon bulk acoustic wave resonator **10** is determined by its lithographically defined horizontal thickness (width). Therefore resonators **10** with different resonant frequencies may be simultaneously fabricated on a single substrate. In addition, frequency tuning capability offered by capacitive transduction mechanisms may be used for post-fabrication fine-tuning of the resonators **10**. FIG. 1a shows an exemplary capacitive silicon bulk acoustic wave resonator **10** having a plurality of resonator elements with different resonance frequencies (different resonator element widths) that are fabricated on a single substrate **11**.

Equation 1 gives the electrical equivalent resistance for a two-port vertical (in-plane) capacitive resonator **10** in general:

$$R_{21} = \frac{\sqrt{KM} g^4}{Q \epsilon_0^2 L_{eff}^2 t^2 V_p^2} \propto \frac{g^4}{Q V_p^2 L_{eff}^2 t^2},$$

where K and M are the effective mechanical mass and stiffness of the resonator **10**, g is the size of the capacitive gap **17**, Q is the quality factor of the resonator **10**,  $V_p$  is the applied polarization voltage,  $L_{eff}$  is the effective length of the electrodes **14**, and t is the thickness (height) of the resonator **10**. The size (g) of the capacitive gap **13** has the most significant contribution in the equivalent resistance.

Increasing the thickness of a resonator **10** to lower the equivalent resistance was demonstrated for HARPSS VHF disk resonators in S. Pourkamali, et al., "VHF single crystal silicon capacitive elliptic bulk-mode disk resonators part II: implementation and characterization", JMEMS, Vol. 13, No. 6, December 2004 and Pourkamali and F. Ayazi, "High frequency capacitive micromechanical resonators with reduced motional resistance using the HARPSS technology", proceedings, 5th Silicon RF topical meeting 2004, pp. 147–150. It was shown theoretically that impedances in the sub-kilo-Ohm range can be achieved in VHF range for disk resonators by pushing fabrication limits to produce larger thickness and smaller capacitive gaps.

However, for UHF disk resonators with diameters smaller than 10  $\mu\text{m}$ , the available area for sensing and actuation is extremely limited resulting in even higher impedances. Vertical capacitive silicon bulk acoustic wave resonators **10** fabricated using the HARPSS process can be tens of micrometers or more thick. On the other hand, the length of the resonator **10** ( $L_{eff}$ ) can be tens to thousands of micrometers providing an extremely large capacitive transduction area. This sets the platform for implementation of low impedance VHF and UHF capacitive resonators **10** without the need for aggressive reduction of the capacitive gap sizes. Furthermore, as opposed to disk resonators, the resonant frequency of the vertical capacitive silicon bulk acoustic wave resonators **10** can be scaled up by reducing their width (horizontal thickness) without decreasing the available transduction area.

Conventional capacitive flexure beam resonators generally have a structure wherein a resonator element is coupled



to adjacent bias pads. However, there are no support beams used in conventional capacitive flexure beam resonators. Furthermore, the resonant frequency of capacitive beam resonator element is a function of multiple in-plane lateral dimensions. Thus, the operating principles of the conventional capacitive flexure beam resonators are generally different from the presently disclosed vertical capacitive silicon bulk acoustic wave resonators **10**.

#### HARPSS-on-SOI Fabrication Process

A three-mask HARPSS-on-SOI fabrication process, such as is discussed by S. Pourkamali and F. Ayazi, in "High frequency capacitive micromechanical resonators with reduced motional resistance using the HARPSS technology", proceedings, 5th Silicon RF topical meeting 2004, pp. 147–150, was used to implement vertical capacitive silicon bulk acoustic wave resonators **10**. The process flow includes only three lithography steps and a number of thin film deposition and etching steps. HARPSS-on-SOI fabrication process is capable of producing tens of micrometer or more resonating elements **15** separated from polysilicon sense and drive electrodes **14** with micrometer-to-nanometer-sized capacitive gaps **13**. The size of the capacitive gaps **13** is determined in a self-aligned manner by the thickness of a deposited sacrificial oxide layer.

Vertical capacitive silicon bulk acoustic wave resonators **10** with different dimensions and sizes of capacitive gaps **13** were fabricated on low resistivity SOI substrates **11**. An exemplary resonator **10** has 225 nm capacitive gaps **13** and is supported at two sides by 3  $\mu\text{m}$  wide, 10  $\mu\text{m}$  long support beams **16**. The support beams **16** are generally placed in the midpoint of the width of the resonator element **15**, which has zero vibration amplitude along the width of the resonator element **15**. However, other arrangements may readily be used. In addition, if the length of the support beams **16** is chosen to be equal to the quarter wavelength at the operating frequency (half of the thickness of the resonator element **15**) it can minimize flow of energy to the substrate **11** and maximize the quality factor of the resonator **10**.

#### Measurement and Characterization

Fabricated resonators **10** were tested in a two-port configuration by direct connection to a network analyzer, and may also be operated in a one-port configuration. FIG. **3** shows the measured frequency response for an exemplary 80  $\mu\text{m}$  long, 20  $\mu\text{m}$  wide resonator **10**. Quality factors of 28,700 in vacuum (shown in FIG. **3**) and 20,200 in air (not shown) were measured for the first horizontal thickness longitudinal mode of this resonator **10** at 213.4 MHz. The measured quality factors are in the range of values measured for side supported SCS disk resonators with similar operating frequency discussed in the "High frequency capacitive micromechanical resonators with reduced motional resistance using the HARPSS technology" paper. Electrical equivalent resistance on the order of 6.3 k $\Omega$  was measured for this resonator **10** which is more than an order of magnitude lower than that of previously reported SCS disk resonators discussed in the "VHF single crystal silicon capacitive elliptic bulk-mode disk resonators part II: implementation and characterization" and "High frequency capacitive micromechanical resonators with reduced motional resistance using the HARPSS technology" papers, and to date is the lowest reported value for a capacitive resonator at such a high frequency.

The same resonator **10** was also operated in its third thickness longitudinal mode at 693 MHz with a Q of 6,000 for example. Due to the location and size of the support beams **16**, in even thickness modes, the support beams **16** are subject to large vibration amplitude imposed by the

resonator element **15** and introduces excessive loss. Consequently the quality factor is too small to detect the resonance peak. However, for higher order odd thickness modes the midpoint of the device width is still the resonance node and high quality factors can be obtained. Also, both even and odd mode may be used.

An electrostatic tuning range of 25 kHz was achieved for an exemplary (first mode) resonator **10** by changing the polarization voltage from 10V to 100 V as shown in FIG. **4**.

FIG. **5** shows the measured temperature dependency of resonant frequency for a 142 MHz vertical capacitive silicon bulk acoustic wave resonator **10** over a temperature range of 24° C. to 200° C. The measured temperature coefficient of frequency (TCF) for this resonator **10** is -26.6 ppm/° C., which is very close the measured values for SCS disk resonators discussed in the "VHF single crystal silicon capacitive elliptic bulk-mode disk resonators part II: implementation and characterization" paper, and conventional piezoelectric film bulk acoustic wave resonators discussed in J. D. Larson, et al, "Power handling and temperature coefficient studies in FBAR duplexers for the 1900 MHz PCS band", Ultrasonics Symposium, 2000, Vol. 1, pp. 869–874.

FIG. **6** is a graph that shows frequency response in the UHF range measured for the third thickness modes of and exemplary vertical capacitive silicon bulk acoustic wave resonator **10**. The measured quality factor is 3,100 at resonant frequency of 502 MHz corresponding to a 30  $\mu\text{m}$  wide resonator **10**, respectively.

Measured quality factors for vertical capacitive silicon bulk acoustic wave resonators **10** vary as a function of their dimensions. Increasing the length and thickness of the resonators **10** with equal frequencies and support size, does not degrade their quality factor. It is thus possible to reduce the equivalent resistance to any required level by increasing the length of the resonator **10** without sacrificing the quality factor.

An effective but power consuming approach to tuning the resonance frequency of the resonator **10** involves passing current through its structure and consequently changing its temperature. Since the resonator element **15** is supported by two support beams **16** on two sides, two polarization voltage bonding pads (bias pads **12**) are available on the two ends of the resonator **10**. By applying slightly different DC voltages to the two pads **16** on the two ends of the resonator **10**, DC current will pass through the SiBAR structure and elevate its temperature. FIGS. **7a** and **7b** show frequency tuning characteristics of an exemplary SiBAR resonator **10** achieved by passing current through the resonator **10**. In particular, FIGS. **7a** and **7b** illustrate test results relating to current tuning of an exemplary resonator **10**. More than 1 MHz (1.2%) of frequency tuning has been achieved by passing up to 24 mA of DC current through the body of the resonator **10**. This corresponds to an elevated temperature of up to 450° C. for the resonator **10**. Current tuning of the resonators can be done by passing AC current through the body of the resonator **10** as well.

Thus, capacitive vertical silicon bulk acoustic resonators have been disclosed that operate in the HF, VHF and UHF bands, exhibit low impedance values and have quality factors of several thousand to several hundreds of thousands. It is to be understood that the above-described embodiments are merely illustrative of some of the many specific embodiments that represent applications of the principles discussed above. Clearly, numerous and other arrangements can be readily devised by those skilled in the art without departing from the scope of the invention.

What is claimed is:

1. Acoustic resonator apparatus, comprising:  
a substrate comprising a resonator element having a  
length-to-frequency-determining-width ratio larger  
than one and that is coupled by way of one or more  
support structures to one or more bias pads; and  
one or more electrodes disposed adjacent sides of the  
resonator element and separated therefrom by one or  
more capacitive gaps;  
and wherein the resonant frequency of the resonator  
element is primarily determined by a single in-plane  
lateral dimension.
2. The apparatus recited in claim 1 wherein the one or  
more electrodes comprise polycrystalline semiconductor  
material.
3. The apparatus recited in claim 1 wherein the resonator  
element has a length that is from several micrometers to  
hundreds of micrometers long.
4. The apparatus recited in claim 1 wherein the resonator  
element comprises a bar having rectangular cross sections.
5. The apparatus recited in claim 1 wherein the substrate  
comprises semiconductor-on-insulator material.
6. The apparatus recited in claim 1 which comprises a  
plurality of resonator elements having different resonance  
frequencies that are fabricated on a single substrate.
7. The apparatus recited in claim 6 wherein the resonator  
element has a length that is from several micrometers to  
hundreds of micrometers long.
8. The apparatus recited in claim 1 wherein the resonator  
element is operated at fundamental resonance and high order  
harmonic frequencies when electrical signals are applied to  
the one or more electrodes.
9. The apparatus recited in claim 1 wherein the resonator  
element comprises an anisotropic material.
10. The apparatus recited in claim 1 wherein the resonator  
element has a thickness-to-width ratio larger than one and is  
several micrometers to hundreds of micrometers thick.
11. The apparatus recited in claim 1 wherein the one or  
more support structures are disposed on sides of the reso-  
nator element.
12. The apparatus recited in claim 1 wherein the resonator  
element has a plurality of notches formed therein.

13. The apparatus recited in claim 12 wherein the notches  
are repeated periodically, dividing resonator element into a  
plurality of similar mechanically connected structures.

14. Acoustic resonator apparatus, comprising:

a substrate comprising a resonator element having a  
frequency-determining-width and that is coupled by  
way of one or more support structures to one or more  
bias pads; and

one or more electrodes disposed adjacent sides of the  
resonator element and separated therefrom by one or  
more capacitive gaps;

wherein the resonant frequency of the resonator element  
is primarily determined by a single in-plane lateral  
dimension;

and wherein the resonator apparatus is frequency tunable.

15. The apparatus recited in claim 14 wherein the reso-  
nator element has a length-to-frequency-determining-width  
ratio larger than one and a length that is from several  
micrometers to hundreds of micrometers long.

16. The apparatus recited in claim 14 wherein frequency  
tuning is done by passing electrical current through the  
resonating element to change and control its temperature.

17. The apparatus recited in claim 14 wherein frequency  
tuning is done by passing electrical current through a heater  
element disposed adjacent to the resonator element to  
change or control its temperature.

18. The apparatus recited in claim 14 wherein frequency  
tuning is done by applying a DC bias difference between the  
bias pads.

19. The apparatus recited in claim 14 wherein the reso-  
nator element is coupled to control circuitry for applying a  
temperature dependant electrical signal to the resonator  
element to cancel or control its temperature dependant  
frequency drift.

20. The apparatus recited in claim 14 wherein one or more  
tuning elements are disposed on or attached to the resonator  
apparatus and frequency tuning is done by selectively  
removing at least a portion of the tuning elements.

\* \* \* \* \*

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,176,770 B2  
APPLICATION NO. : 11/208818  
DATED : February 13, 2007  
INVENTOR(S) : Farrokh Ayazi et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

The following section should be added before the Background of the Invention section:

Col. 1 Line 1-3

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR  
DEVELOPMENT

This invention was made with Government support under Contract No.  
DAAH01-01-1-R004 awarded by the US Army Aviation and Missile Command.  
The Government has certain rights in the invention.

Signed and Sealed this

Fourth Day of March, 2008

A handwritten signature in black ink, reading "Jon W. Dudas". The signature is stylized, with a large, looped initial "J" and a distinct "D" at the end.

JON W. DUDAS  
*Director of the United States Patent and Trademark Office*